

Reduce the risk of equipment failure due to overheating by providing cool air exactly where required, eliminating unwanted high temperatures or heat build-up.

Free area is 46%

CVLDF Light duty flanged linear bar floor grille is designed to satisfy most applications where light or medium foot traffic will be experienced.

Constructed from aluminium extrusions using a 6.0mm blade on a 12.5mm pitch with either a 20mm or 25mm wide flange border having a fixed core as standard or optional removable core.


Intermediate additional support bars are necessary to give the additional strength needed for a floor application.

Flangeless grilles are also available in a re-enforced angle frame.

CVLDF can be used on either supply or extract systems and may be fitted with an optional opposed blade damper. A connection plenum box can be fabricated to suit rectangular or circular duct connections.

Standard finish is Mill aluminium. A polyester powder coated finish can be applied to a standard RAL/BS colour, or as a special option a chrome finish may also be provided.

Made to order product. Price on given dimensions.

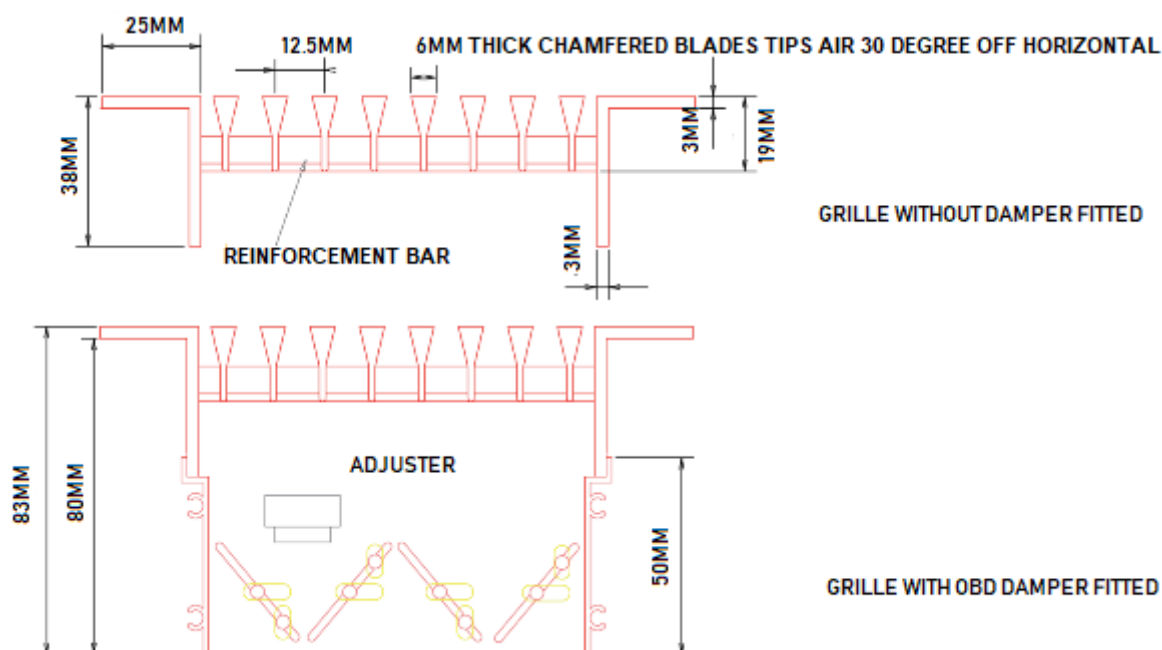

Standard 25mm flange can be cut down to 20mm on request.

